


FTRV Wall Switch Spec Sheet

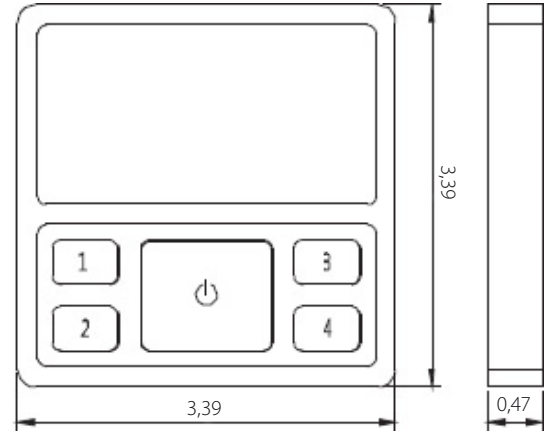

Length, inch	Width, inch	Height, inch
3,39"	3,39"	0,47"

Features


1. Powered by solar cell or optical energy
2. USB charging is available
3. Bluetooth communication
4. No external connection, Easy installation
5. Controls up to 255 fixtures

REMARK: Do not use it in the metal region and the strong electromagnetic wave area

Specifications

Communication Way: Bluetooth	Working Condition Humidity: ≤90% RH
Supply Voltage: 3V (5V for USB charging)	Working Condition Temperature: -10°~+45°C
Flame Retardant Rating: UL 94 V-0	Net Weight: 0,15 lbs

Remark

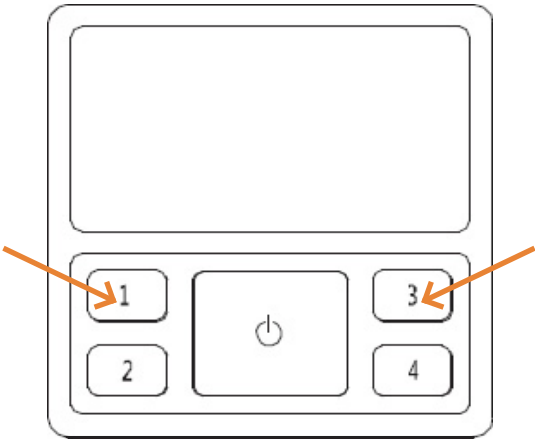






Pressing button 1 and 3 together over 2 seconds achieves reset function and enters pairing mode for 30 seconds. Then, switch can be added by APP searching within 30 seconds.

Buttons Functions



*Light or light group can be associated

	Dim Raise		Auto-brightness according to the APP default
	Dim Lower		Scene Switching: three scenes at most
	On / Off		