

FSWP-SNC

SMART WALLPACK SMALL NON-CUTOFF SERIES

The Fidelux FSWP-SNC Smart Wallpack Small Non-Cutoff Series provides high light levels in a highly durable weather-resistant package. This easily installed series is designed for low wall-mounted outdoor applications such as over-the-door, egress lighting, perimeter/ accent illumination, and security lighting environments.

- Frosted polycarbonate lens
- Energy efficient performance up to 149 lm/W
- Die-cast aluminum housing

- Durable powder coated bronze finish
- >54,000 hour operating life (L70)
- 0-10V Dimming

HOUSING Die-cast aluminum housing with powder coated bronze finish. Three 1/2" conduit entries.

LENS Frosted polycarbonate, 88% transmission.

LEDS Beam spread 100 degrees. LM-80 tested. CRI >80. Operating life >54,000 hours (L70). Selectable CCT.

ELECTRICAL 120-277V, 50/60 Hz, power factor >0.9. THD <20%. Drive current 144.7 mA (15W units), 260 mA (20W units).

CONTROLS AND SENSORS 0-10V dimmable standard. Photocell optional.

TEMPERATURE Designed to operate in temperatures of -40°F to 113°F (-40°C to 45°C).

ACCESS / WIRING Three 1/2" conduit entries. Housing access via crosshead screwdriver. Standard wiring and connections via quick connect clips (included).

MOUNTING Wall mounting.

WEIGHT 2.31 lbs

LISTINGS DLC Premium. UL Wet Location. IP65.


WARRANTY 5 year limited warranty.

Project _____



Catalog Number _____

Type _____

Date _____



CONDUIT ENTRIES 1/2"



8.6"

5.0"

3.0"

Ordering Guide

Example: FSWP-SNC-20W-40K-UNV-D

Series	Wattage	CCT	Voltage
FSWP-SNC	15W 20W	30K 3000K 40K 4000K 50K 5000K	UNV-D 120/277V, 0-10V Dimming STD

Options
PC Photocell

Please see Specification Summary on Page 2 for DLC Product ID.




LISTED
WET LOCATION



Photometrics

FSWP-SNC-15W

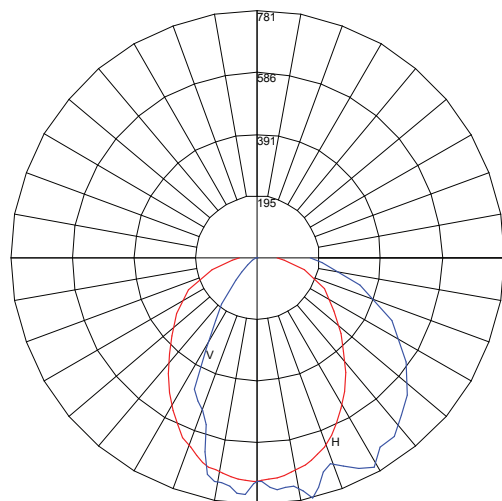


Axial Candela

Maximum Candela = 781.15

Located At Horizontal Angle = 0, Vertical Angle = 13.0

FSWP-SNC-20W

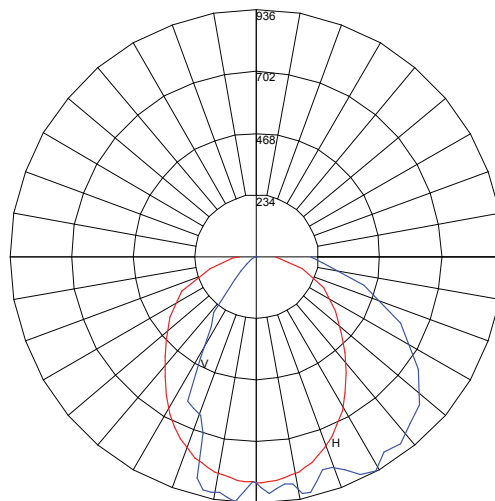

Axial Candela

Maximum Candela = 935.87

Located At Horizontal Angle = 0, Vertical Angle = 29.0



FSWP-SNC Series Specification Summary

	FSWP-SNC-15W	FSWP-SNC-20W
DLC Primary Use	Outdoor Non-Cutoff and Semi-Cutoff Wall Mounted Area Luminaires	
DLC Product ID	PMXNBB6G	PA3PDE61
Input Wattage	16W	20W
Efficacy Range lm/W	132.25 - 149.06	130.45 - 146.05
Lumens @ 3000K	2116	2609
Lumens @ 4000K	2385	2921
Lumens @ 5000K	2260	2703
CRI	84	72+
THD @ 277VAC	<=20%	
Color Temperatures	3000K / 4000K / 5000K	
Dimming	0-10V	
Input Voltage Options	100-277VAC	
Power Factor	>=0.9	
Beam Spread	100.0°	
L70 Lifespan (TM21)	>54,000 hours	
Ambient Working Temp	-40°F to 113°F (-40°C to 45°C)	
Max Dimensions (in)	3.0"D x 5.0"W x 8.6"H	
Total Weight	2.31 lbs	
Limited Warranty	5 Yrs.	

Values are nominal